## Quandary® UPHOLSTERY FABRIC 5\*

100% Polyester





CAMEO

BARTLETT



LEAPFROG







TUSCAN SUN







MOLLUSK



GALAPAGOS



RED BARN

BONFIRE

WOODGRAIN

BLUE JEANS

## TECHNICAL INFORMATION

Fiber: 100% Polyester

Backing | Finish: Acrylic with Teflon®

A Abrasion Resistance: 75,000 double rubs (cotton duck)

Weight: 13.6 ounces per linear yard (420 g/m)

Width: 54" (137-140 cm)

Repeat: 3-11/16"H x 3-1/4"V (Pattern is woven up the roll and suitable for railroading)


**\* Lightfastness:** 40 Hours, Class 5

Colorfastness: Wet - Class 5 | Dry - Class 4.5 Seam Slippage\*: Warp - 90 lbs | Fill - 95 lbs.

Cleaning Instructions: WS - For water based stains, use mild detergent foam or upholstery shampoo. For oil based stains, spot clean with a dry cleaning solvent being sure to test area first.

## Flame Resistance: California Technical Bulletin 117, Section E; CS-191-53, Class 1; BIFMA X5.7-1991; UFAC, Class 1; B. S. 5852 Part 1: 1979 Ignition Source 0, smouldering cigarette.

Fabrics by Absecon Mills, Inc. Fabric performance symbols indicate that a fabric performs to commercial furniture manufacturing standards and passes all applicable testing as specified by the Association for Contract Textiles (ACT).

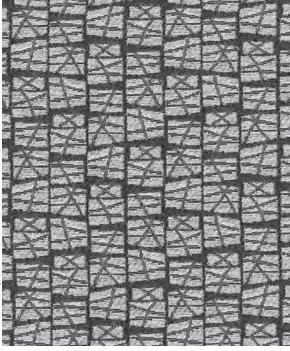

Pattern not shown to scale. This is a general represenation of the overall appearance of the design shown in multiple repeats













11/2013 | For additional cards or memo samples:

email samples@absecon.com or call 1-877-356-4557



Absecon Mills is focused on being a responsible corporate entity and we are continually striving to find ways to help preserve our environment, increase energy efficiency and reduce waste. Our mode of manufacturing is specifically designed to prevent damage to the environment. Our products are woven using wind power and many are constructed riendly with polypropylene (a by-product of gasoline manufacturing, utilizing post-industrial waste) and recycled polyester, which helps keep post-consumer waste in the material stream and out of landfills. Absecon offers finishes that use ten times

less fluorocarbons than conventional finishes and are SCS Indoor Advantage Gold certified. We participate in a fabric recycling program and work hard to lessen our footprint on the environment. For more information on our green initiatives, please visit www.absecon.com



WIND POWER

Colors may vary slightly from dye lot to dye lot.

\*ASTM-D-3597-02: Seam 12mm from edge using 7 stitches per 25mm (1"), plain lock stitch and a 22 ballpoint needle)



